

WR112 Waveguide Circulator



Features

- Waveguide Circulator
- Low Insertion Loss
- High Isolation
- WR-112 Waveguide interface

Applications

- Test and Measurement
- Microwave Radio System
- Radar systems
- Military applications


1. Electrical Specification, 25°C

Parameter	Min.	Typ.	Max.	Unit
Frequency Range	9.345		9.405	GHz
Insertion Loss			0.3	dB
VSWR			1.15 : 1	
Isolation	20.0			dB

2. Mechanical Specifications

Description	
Dimension	Refer to the drawing
Waveguide Flange type	WR-112 Cover Sleeve type
Flange hole	8-32UNC Tap
Material	Aluminum Alloy
Finish	Chromate

3. Outline Drawing

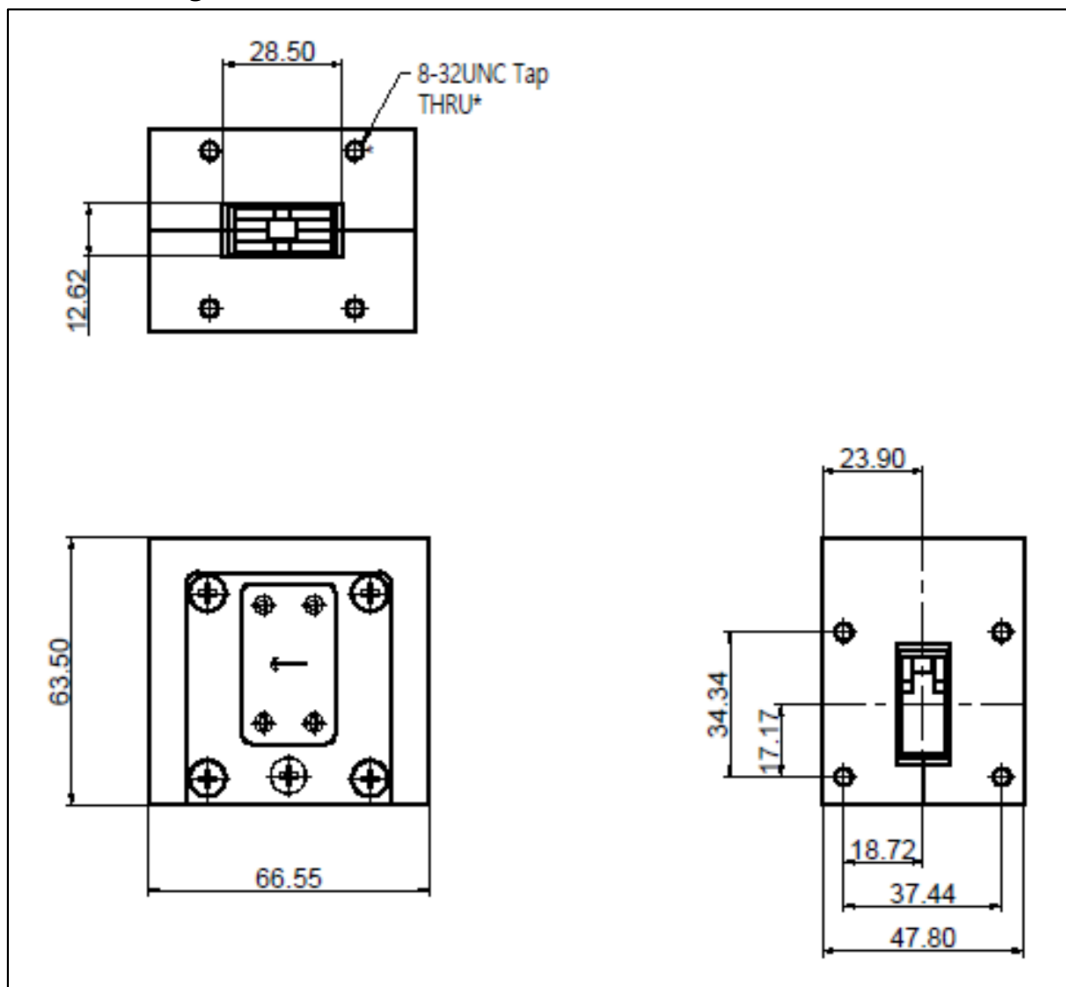

All Dimensions in mm